


Hydraulic Detachable Gooseneck **XL 120 HDG**

Capacity: 120,000 IN 10' - OAL: 50' 5"

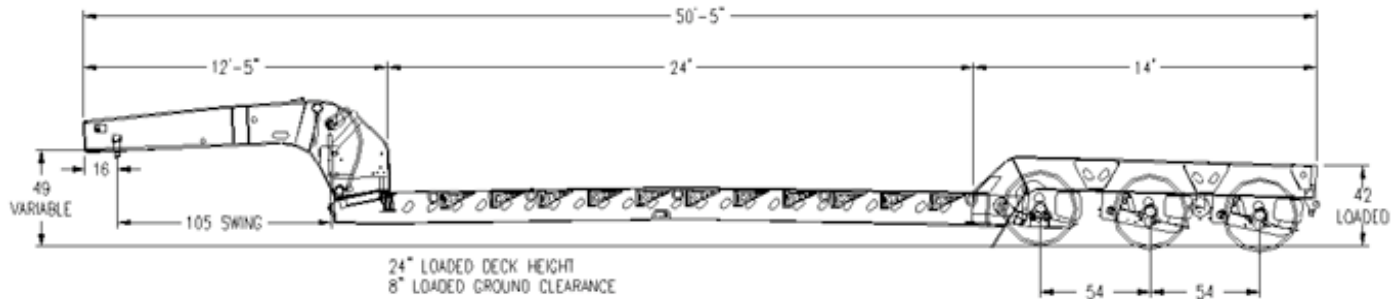

SPECIFICATIONS

GOOSENECK

HYD. DETACHABLE NARROW NECK
APPROXIMATELY 35" TRAVEL
12' 5" NON GROUND BEARING
7 POSITION 5TH WHEEL HEIGHT
105" SWING CLEARANCE
16" KING PIN SETTING
HYDRAULICS RUN OFF OF WET KIT
AIR OPERATED LOCK W/ MANUAL SAFETY LATCH

MAIN DECK

T I FLANGE 80K WEB
4 BEAMS 16", (FULLY CAMBERED)
24' LONG
102" WIDE
24" LOADED DECK HEIGHT
8" GROUND CLEARANCE
10" & 4" JR. I-BEAM 12" ALT. CTRS.
10 BENT D-RINGS TOTAL
1 3/4" APITONG DECKING RAISED
DECKED OUTSIDE OF MAIN BEAMS, ONLY
SWING OUT OUTRIGGERS ON 24" CENTERS
DOUBLE OUTRIGGERS UP FRONT

REAR BRIDGE

OPEN WHEELS W/ BOLSTERS
OPEN BOOM WELL
40" DECK HEIGHT
14' LONG
2 BENT D-RINGS IN TAIL CHANNEL
FRAME REINFORCEMENT FOR
SINGLE AXLE BOOSTER
WITH AIR, ELECTRIC, & BKTS
MUD FLAPS
ONE PAIR OF FLAG HOLDERS

SUSPENSION

25,000 # AIR RIDE

AXLES

(3) 25,000# NOMINAL 5/8" WALL
54" SPACING
HUB PILOT, OUTBOARD DRUMS
16 1/2" X 7" BRAKES
AUTO SLACK ADJUSTERS
LIMIT CHAINS ON ALL AXLES
SPRING BRAKES ON 1 AXLE
*(ABS NOT REQUIRED)

WHEELS & TIRES

8.25 X 22.5 STEEL RIMS
255/ 70R/ 22.5 H RATED TIRES

LIGHTING

12V SEALED HARNESS D.O.T. APPROVED
2 TAIL LT PKG W/ ALUMINUM COVER
1 MID-TURN SIGNAL PER SIDE
2 CLEARANCE LIGHTS PER SIDE
7 POLE ELECTRICAL SOCKET
RUBBER MT. LIGHTS

PAINT

BLACK, IH RED, OR NEW CAT YELLOW
PRIMED BEFORE PAINT
2 PART EPOXY PRIMER
URETHANE PAINT
AIR & ELEC. DONE AFTER PAINT
RED/WHITE CONSPICUITY TAPE

WEIGHT + / - 3% - 24,800 lbs.
Additional Weight per foot of trailer: 292 lbs.