


Hydraulic Detachable Extendable **XL 80 HDE**

Capacity: 80,000 CONC: 60,000 IN 10' CLOSED - OAL: 48'

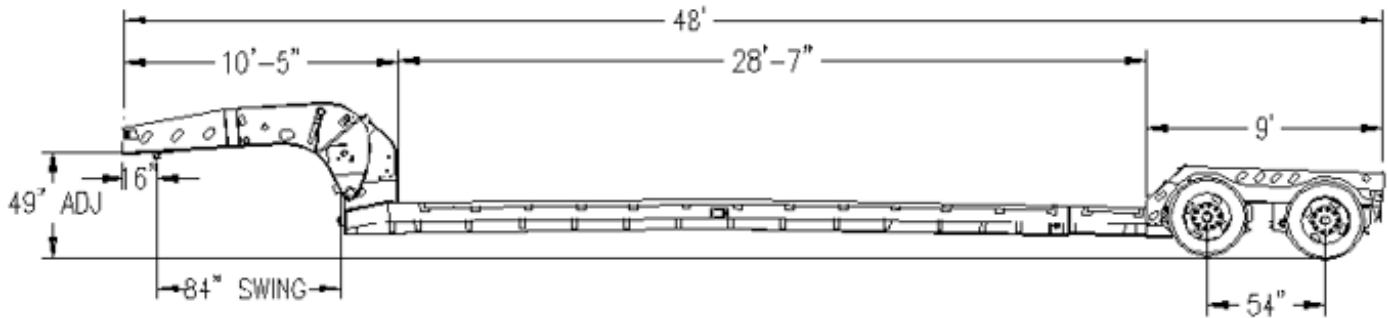

SPECIFICATIONS

GOOSENECK

HYD. DETACHABLE NARROW NECK
APPROXIMATELY 35" TRAVEL
10' 5" NON GROUND BEARING
7 POSITION 5TH WHEEL HEIGHT
84" SWING CLEARANCE
16" KING PIN SETTING
HYDRAULICS RUN OFF OF WET KIT
AIR OPERATED LOCK W/ MANUAL SAFETY LATCH

MAIN DECK

T I FLANGE 80K WEB
28' 7" / 49' 5"
102" WIDE
20" LOADED DECK HEIGHT
6" GROUND CLEARANCE
8" MILL CHANNEL SIDE RAILS
DOUBLE BOX BEAM CONSTRUCTION
STAKE POCKETS ON 24" CENTERS
5/16" x 2" RUB RAIL W/ SINGLE PIPE SPOOLS
6" JR. I-BEAM XMEM ON 12" ALT. CTRS
EXTEND-A-TRAC (PATENT)
1 1/8" APITONG DECKING FLUSH
AIR OPERATED LOCK PIN W/ 5 STOPS 2'-3'-5'-5'-5'
6" GREASABLE ROLLERS

REAR BRIDGE

9' LONG
102" WIDE
COVERED WHEELS W/ 40" DECK HT.
1 1/8" APITONG DECKING FLUSH
ONE PAIR OF FLAG HOLDERS
2 BENT D-RINGS IN TAIL CHANNEL

SUSPENSION

25,000 # AIR RIDE

AXLES

(2) 25,000# NOMINAL
54" SPACING
HUB PILOT, OUTBOARD DRUMS
4S2M ABS
16 1/2" X 7" BRAKES

WHEELS & TIRES

8.25 X 22.5 STEEL RIMS
255 / 70R / 22.5

LIGHTING

12V SEALED HARNESS D.O.T. APPROVED
RUBBER MT. LIGHTS
1 MID-TURN SIGNAL / SIDE
2 CLEARANCE LIGHTS / SIDE
7 POLE ELECTRICAL SOCKET
2 TAIL LT PKG W/ ALUM. COVER

PAINT

BLACK, IH RED, NEW CAT YELLOW
PRIMED BEFORE PAINT
2 PART EPOXY PRIMER
URETHANE ENAMEL PAINT
AIR & ELEC. DONE AFTER PAINT
RED/WHITE CONSPICUITY TAPE

Additional Weight per foot of trailer: 363 lbs.