


Step Deck **X-L 100 SD**

Capacity: 100,000 CONC: 80,000 IN 10' OAL: 48'

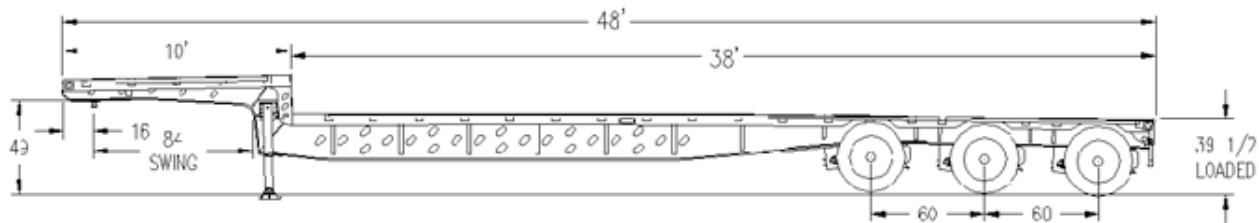

SPECIFICATIONS

GOOSENECK

10' LONG
102" WIDE
2 SPEED LANDING GEAR, HANDLE CURB SIDE
16" KING PIN SETTING W/ 84" SWING CLEARANCE
STAKE POCKETS ON 24" CENTERS
5/16" X 2 " RUB RAIL W/ SINGLE PIPE SPOOLS
49" 5TH WHEEL HEIGHT
1 1/8" APITONG DECKING FLUSH

MAIN DECK

T I FLANGE 80K WEB
38' MAIN DECK LENGTH
8" MILL CHANNEL SIDE RAILS
102" WIDE
39 1/2" LOADED DECK HEIGHT
STAKE POCKETS ON 24" CENTERS
5/16" X 2 " RUB RAIL W/ SINGLE PIPE SPOOLS
6" JR. I-BEAM CROSS MEMBERS ON 12" CENTERS
1 1/8" APITONG DECKING FLUSH
KNEE BRACES 36" O/C
COVERED WHEELS W/ 39 1/2" DECK HT.

SUSPENSION

25,000 # AIR RIDE

AXLES

(3) 25,000# NOMINAL
60" AXLE SPACING
HUB PILOT, OUTBOARD DRUMS
4S2M ABS
16 1/2" X 7" BRAKES

WHEELS & TIRES

8.25 X 22.5 STEEL RIMS
255 / 70R / 22.5

LIGHTING

12V SEALED HARNESS D.O.T. APPROVED
RUBBER MT. LIGHTS
1 MID-TURN SIGNAL / SIDE
2 CLEARANCE LIGHTS / SIDE
7 POLE ELECTRICAL SOCKET
2 TAIL LIGHT PKG W/ ALUM COVER

PAINT

BLACK, IH RED, OR NEW CAT YELLOW
PRIMED BEFORE PAINT
2 PART EPOXY PRIMER
URETHANE PAINT
AIR & ELEC. DONE AFTER PAINT
RED/WHITE CONSPICUITY TAPE

ADDITIONAL WEIGHT PER FOOT OF TRAILER: 200 POUNDS
WEIGHT + / - 3%: 14,050