


Mechanical Full Width Gooseneck **XL 120-MFG**

Capacity: DIST. 120,000 IN 16' OAL: 48'

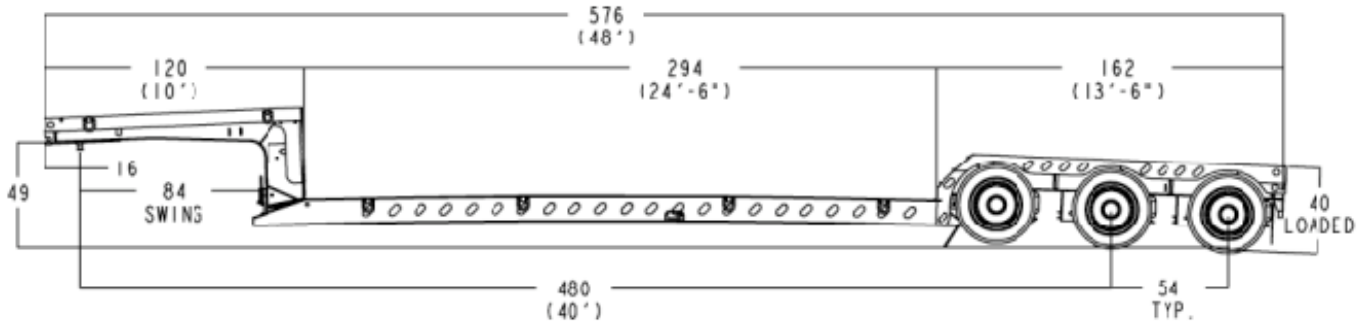

SPECIFICATIONS

GOOSENECK

MECH. DETACHABLE FULL WIDTH
10' LONG
102" WIDE
49" 5TH WHEEL HEIGHT
84" SWING CLEARANCE
16" KING PIN SETTING
2 BENT D-RINGS PER SIDE-4 TOTAL
1 1/8" APITONG DECKING FLUSH
ALUMINUM MUD FLAPS

MAIN DECK

24' 6" LONG
4 FAB I-BEAMS 16"
T I FLANGE 80K WEB
102" WIDE
24" LOADED DECK HEIGHT
8" GROUND CLEARANCE
10" & 4"JR I-BEAM XMEM ON 12" ALT. CTRS
4 BENT D-RINGS PER SIDE-8 TOTAL
1 1/8" APITONG DECKING FLUSH
RAMP TAPERS TO 4"

REAR BRIDGE

13' 6" LONG
40" LOADED DECK HEIGHT
102" WIDE
1 1/8" APITONG DECKING FLUSH
2 BENT D-RINGS IN TAIL CHANNEL
LOAD BEARING

SUSPENSION

25,000 # AIR RIDE

AXLES

(3) 25,000 # NOMINAL
54" SPACING
HUB PILOT, OUTBOARD DRUMS
4S2M ABS
16 1/2" X 7" BRAKES
2 PAIR SPRING BRAKES

WHEELS & TIRES

8.25 X 22.5 STEEL RIMS
255/ 70R/ 22.5 TIRES

LIGHTING

12V SEALED HARNESS D.O.T. APPROVED
RUBBER MT. LIGHTS
1 MID-TURN SIGNAL / SIDE
2 CLEARANCE LIGHTS / SIDE
7 POLE ELECTRICAL SOCKET
2 TAIL LT PKG W/ POL. ALUM. COVER

PAINT

BLACK, IH RED, NEW CAT YELLOW
PRIMED BEFORE PAINT
2 PART EPOXY PRIMER
URETHANE PAINT
AIR & ELEC. DONE AFTER PAINT
RED & WHITE COSPICUITY TAPE

**WEIGHT (+ / - 3%) 17,900 LBS.
ADDITIONAL WEIGHT PER FOOT OF TRAILER: 400 POUNDS**