


Step Deck Extendable **XL 120 SDE**

Capacity: 120,000 CONC: 100,000 IN 10' CLOSED - OAL: 48'

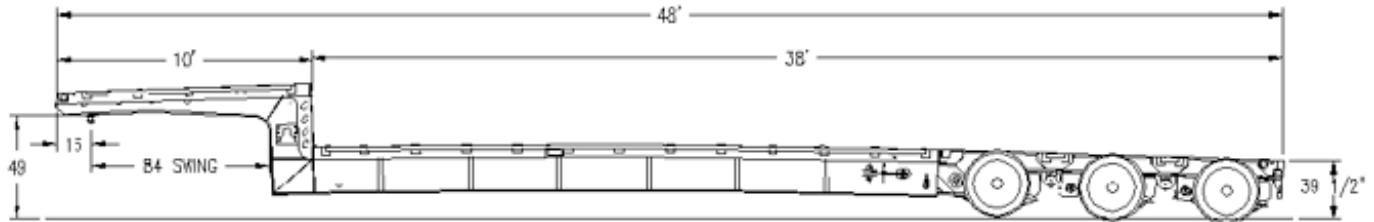

SPECIFICATIONS

GOOSENECK

10' LONG
102" WIDE
2 SPEED LANDING GEAR, HANDLE CURB SIDE
16" KING PIN SETTING W/ 84" SWING CLEARANCE
5/16" X 2" RUB RAIL W/ SINGLE PIPE SPOOLS
49" 5TH WHEEL HEIGHT
ONE PAIR OF FLAG HOLDERS
1 1/8" APITONG DECKING FLUSH

MAIN DECK

T I FLANGE 80K WEB
38' EXTENDING TO 58' 4"
8" MILLED SIDE RAILS
STAKE POCKETS ON 24" CENTERS
102" WIDE
39 1/2" LOADED DECK HEIGHT W/ CVRD WHEELS
5/16" X 2" RUB RAIL W/ SINGLE PIPE SPOOLS
6" JR. I-BEAM CROSS MEMBERS ON 12" CENTERS
EXTEND-A-TRAC (PATENT PENDING)
1 1/8" APITONG DECKING FLUSH
AIR OPERATED LOCK PIN W/ 5 STOPS 2'-3'-5'-5'
6" GREASABLE ROLLERS
ONE PAIR OF FLAG HOLDERS

SUSPENSION

25,000 # AIR RIDE

AXLES

(3) 25,000# NOMINAL
54" SPACING
HUB PILOT, OUTBOARD DRUMS
ABS N/A
16 1/2" X 7" BRAKES

WHEELS & TIRES

8.25 X 22.5 STEEL RIMS
255 / 70R / 22.5

LIGHTING

12V SEALED HARNESS D.O.T. APPROVED
RUBBER MT. LIGHTS
1 MID-TURN SIGNAL / SIDE
2 CLEARANCE LIGHTS / SIDE
7 POLE ELECTRICAL SOCKET
2 TAIL LT PKG W/ ALUM. COVER

PAINT

BLACK, IH RED, NEW CAT YELLOW
PRIMED BEFORE PAINT
2 PART EPOXY PRIMER
URETHANE PAINT
AIR & ELEC. DONE AFTER PAINT
RED/WHITE CONSPICUITY TAPE

WEIGHT + / - 3% - 24,040 lbs.
Additional Weight per foot of trailer: 286 lbs.