


Mechanical Full Width Gooseneck **XL 60-MFG**

Capacity: DIST. 60,000 IN 16' OAL: 48'

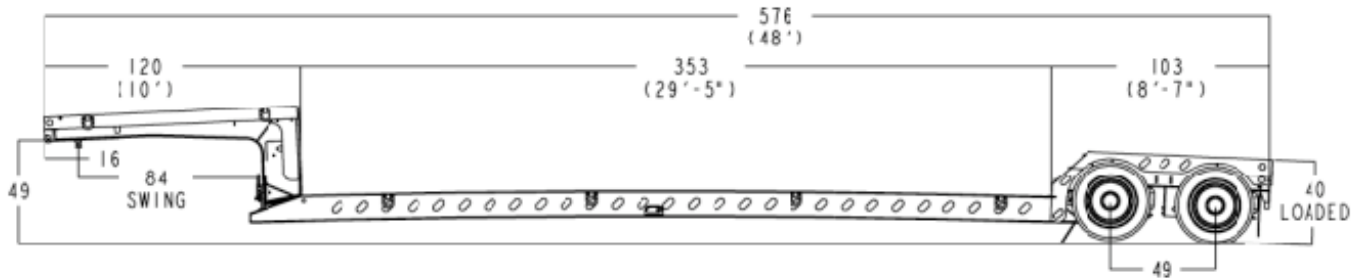

SPECIFICATIONS

GOOSENECK

MECH. DETACHABLE FULL WIDTH
ALUMINUM MUD FLAPS
10' LONG
102" WIDE
49" 5TH WHEEL HEIGHT
84" SWING CLEARANCE
16" KING PIN SETTING
2 BENT D-RINGS PER SIDE-4 TOTAL
1 1/8" APITONG DECKING FLUSH

MAIN DECK

T I FLANGE 80K WEB
4 FAB I-BEAMS 12"
29' 5" LONG
102" WIDE
18" LOADED DECK HEIGHT
6" GROUND CLEARANCE
6" & 4"JR I-BEAM XMEM ON 12" ALT. CTRS
4 BENT D-RINGS PER SIDE-8 TOTAL
1 1/8" APITONG DECKING FLUSH
RAMP TAPERS TO 4"

REAR BRIDGE

8' 7" LONG
40" LOADED DECK HEIGHT
102" WIDE
1 1/8" APITONG DECKING FLUSH
2 BENT D-RINGS IN TAIL CHANNEL
LOAD BEARING

SUSPENSION

25,000 # AIR RIDE

AXLES

(2) 25,000 # NOMINAL
49" SPACING
HUB PILOT, OUTBOARD DRUMS
4S2M ABS
16 1/2" X 7" BRAKES

WHEELS & TIRES

8.25 X 22.5 STEEL RIMS
255/ 70R/ 22.5 TIRES

LIGHTING

12V SEALED HARNESS D.O.T. APPROVED
RUBBER MT. LIGHTS
1 MID-TURN SIGNAL / SIDE
2 CLEARANCE LIGHTS / SIDE
7 POLE ELECTRICAL SOCKET
2 TAIL LT PKG W/ POL. ALUM. COVER

PAINT

BLACK
STEEL SHOT BLASTED
2 PART EPOXY PRIMER
ACRYLIC ENAMEL PAINT
AIR & ELEC. DONE AFTER PAINT
RED & WHITE COSPICIUTY TAPE

WEIGHT (+/- 3%) 14,100 LBS.
ADDITIONAL WEIGHT PER FOOT OF TRAILER: 250 POUNDS